



料号 Material No	类别 Category	材质 The material	数量/pcs
C3003H-1*3P无耳	Housing	Nylon 66 UL 94V-0 (Black)	1000pcs/包

Poles	Part NO.		Dimensions mm	
			A	B
2	3003H-1*2P	MX3.0H-1*2P	3.00	8.60
3	3003H-1*3P	MX3.0H-1*3P	6.00	11.60
4	3003H-1*4P	MX3.0H-1*4P	9.00	14.60
5	3003H-1*5P	MX3.0H-1*5P	12.00	17.60

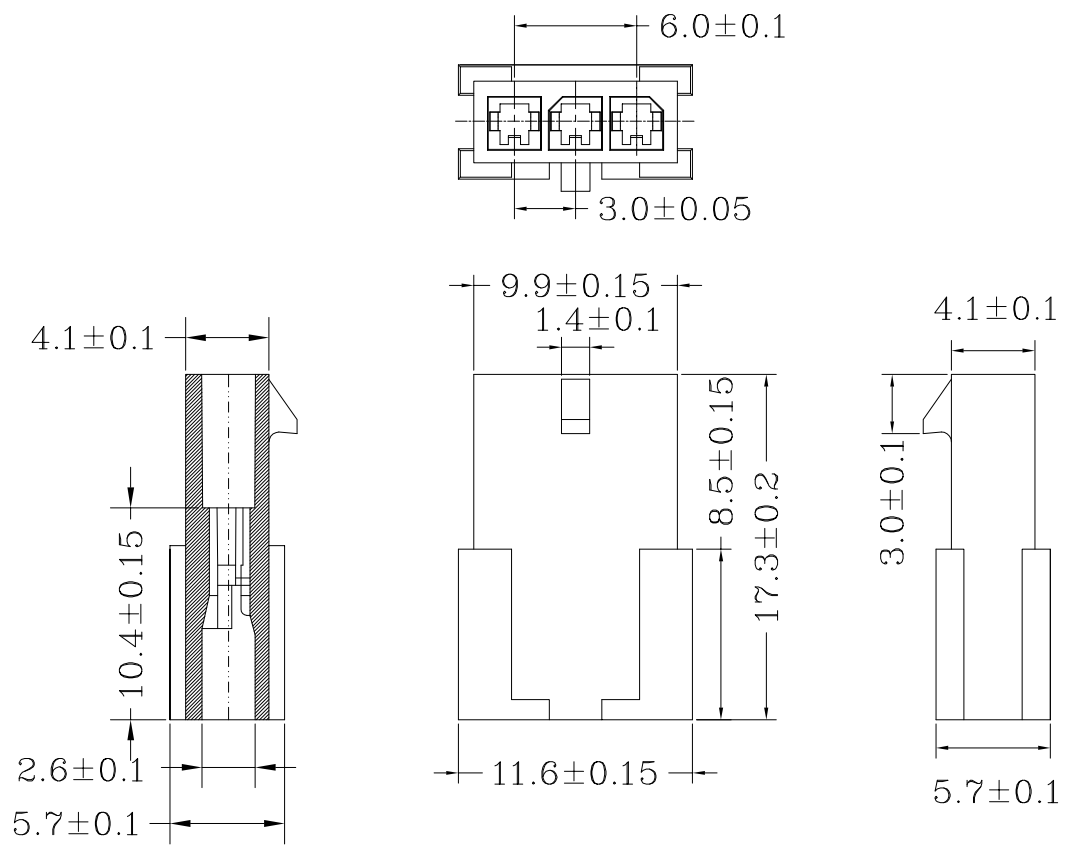

规格 Specifications

- ◆1、极数 Poles: 1X2P/1X6P to 2X1P/2X12P
- ◆2、额定电流 Current rating: 5.0A AC, DC
- ◆3、额定电压 Voltage rating: 250V AC, DC
- ◆4、温度范围 Temperature range: -25°C to $+85^{\circ}\text{C}$
- ◆5、接触电阻 Contact resistance: $\leq 15\text{m}\Omega$
- ◆6、绝缘电阻 Insulation resistance: $\geq 1000\text{m}\Omega$
- ◆7、耐电压 Withstand voltage: 1500V AC/minute
- ◆8、适用线规 Applicable wire: AWG #30 to #20
- ◆9、适用基板厚度 (Applicable PC board thickness): 1.6mm to 2.0mm

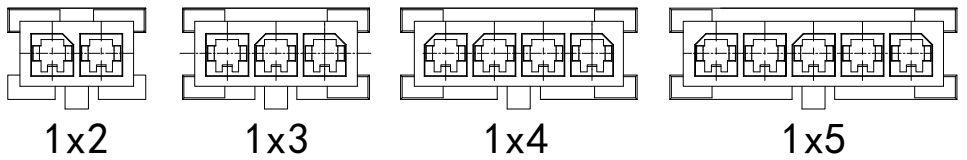

未注公差				HWT 广州市恒炜电子有限公司 GuangZhou HengWei Electronic Co., Ltd					
>0-3	>3-18	>18-50	>50-120	单位	比例	Design Units	SIZE	页码	
± 0.12	± 0.15	± 0.3	± 0.5	MM Only	—	METRIC	A4		
制作	审核	批准	材料	图号	Part No				
姚灿瑜	陈小波	王日和	见图解	品名	MX3.0 (C3003H) -1X3P无耳母壳				