

15

14

13

12

11

10

9

8

7

6

5







4

3


2

1


料号 Material No	类别 Category	材质 The material	数量/pcs The number of pcs
C3004H-2*2P	HOUSING	胶壳 Base Nylon 66 UL 94V-0 (Black)	1000pcs/包




2x1




2x6




2x7

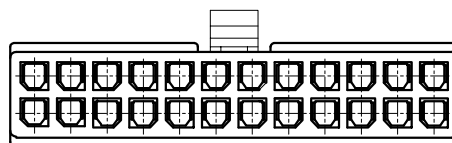


2x12




2x2




2x5




2x8

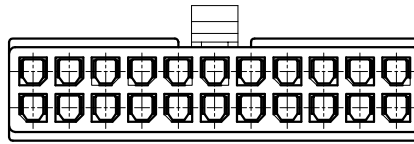


2x11




2x3



2x4



2x9

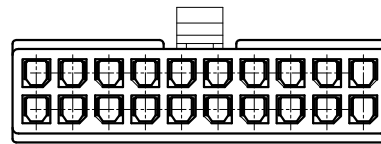

2x10

规格 Specifications

- ◆1、极数 Poles: 1X2P/1X6P to 2X1P/2X12P
- ◆2、额定电流 Current rating: 5.0A AC, DC
- ◆3、额定电压 Voltage rating: 250V AC, DC
- ◆4、温度范围 Temperature range: -25°C to +85°C
- ◆5、接触电阻 Contact resistance: $\leq 15m\Omega$
- ◆6、绝缘电阻 Insulation resistance: $\geq 1000m\Omega$
- ◆7、耐电压 Withstand voltage: 1500V AC/minute
- ◆8、适用线规 Applicable wire: AWG #30 to #20
- ◆9、适用基板厚度 (Applicable PC board thickness): 1.6mm to 2.0mm

未注公差

>0-3	>3-18	>18-50	>50-120
±0.12	±0.15	±0.3	±0.5
制作	审核	批准	
姚灿瑜	陈小波	王日和	

HWT 广州市恒炜电子有限公司
GuangZhou HengWei Electronic Co., Ltd

单位	比例	Design Units	SIZE	页码	
MM Only	—	METRIC	A4		
材料	图号	Part No			
见图解	品名	MX3.0 (3004H) -2X2P公壳			

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1