

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

料号
Material no类别
Category材质
The material数量/pcs
The number of pcs

4202H-2X3P


Housing

外壳 Base Nylon 66 UL 94V-0 (Black)

1000pcs

Dimensional Information:

Poles	Part NO.		Dimensions mm		
			A	B	C
2	C4202H-2X1P	5557H-2X1P	—	5.40	5.60
4	C4202H-2X2P	5557H-2X2P	4.20	9.60	9.80
6	C4202H-2X3P	5557H-2X3P	8.40	13.80	14.00
8	C4202H-2X4P	5557H-2X4P	12.60	18.00	18.20
10	C4202H-2X5P	5557H-2X5P	16.80	22.20	22.40
12	C4202H-2X6P	5557H-2X6P	21.00	26.40	26.60
14	C4202H-2X7P	5557H-2X7P	25.20	30.60	30.80
16	C4202H-2X8P	5557H-2X8P	29.40	34.80	35.00
18	C4202H-2X9P	5557H-2X9P	33.60	39.00	39.20
20	C4202H-2X10P	5557H-2X10P	37.80	43.20	43.40
22	C4202H-2X11P	5557H-2X11P	42.00	47.40	47.60
24	C4202H-2X12P	5557H-2X12P	46.20	51.60	51.80
2	C4202H-1X2P	5557H-1X2P	4.20	9.60	9.80
3	C4202H-1X3P	5557H-1X3P	8.40	13.80	14.00
4	C4202H-1X4P	5557H-1X4P	12.60	18.00	18.20
5	C4202H-1X5P	5557H-1X5P	16.80	22.20	22.40

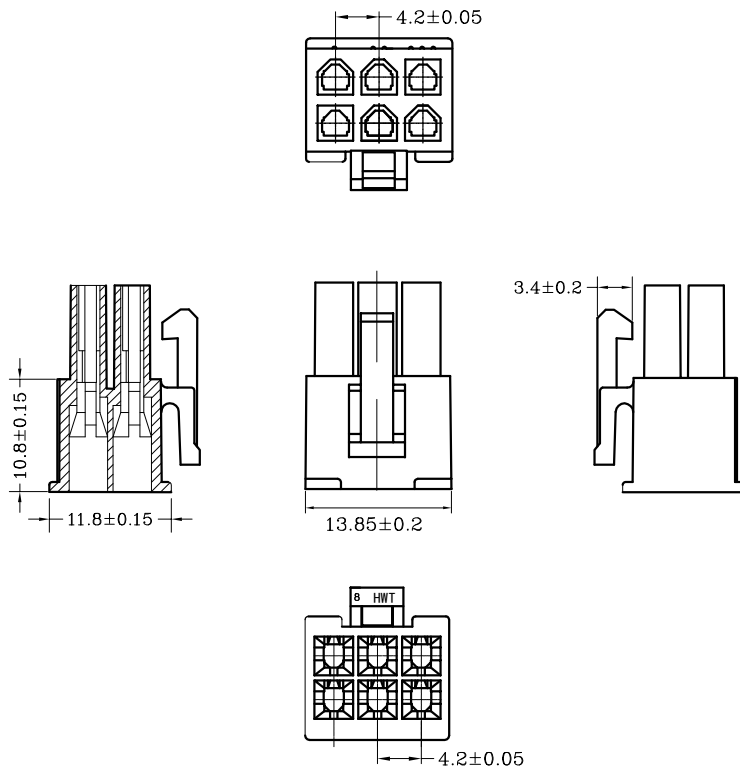

规格 Specifications

- ◆1、极数 Poles: 1X2P/1X5P to 2X1P/2X12P
- ◆2、额定电流 Current rating: 4.0A AC, DC
- ◆3、额定电压 Voltage rating: 250V AC, DC
- ◆4、温度范围 Temperature range: -25°C to +85°C
- ◆5、接触电阻 Contact resistance: ≤10mΩ
- ◆6、绝缘电阻 Insulation resistance: ≥1000mΩ
- ◆7、耐电压 Withstand voltage: 1500V AC/minute
- ◆8、适用线规 Applicable wire: AWG #16 to #22
- ◆9、适用基板厚度 (Applicable PC board thickness):

0.8mm to 2.0mm

未注公差

>0-3	>3-18	>18-50	>50-120
------	-------	--------	---------

HWT 广州市恒炜电子有限公司
GuangZhou HengWei Electronic co., LTD

±0.12	±0.15	±0.3	±0.5	单位	比例	Design Units	SIZE	页码	
制作	审核	批准		MM Only	—	METRIC	A4		
				材料	图号			Part No	
				见图解	品名				

4202H-2X3P

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1