
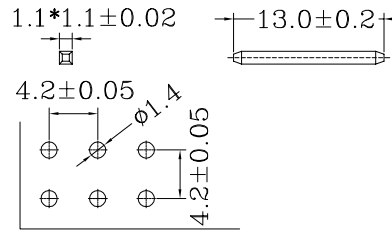





料号 Material No	类别 Category	材质 The material	数量/pcs The number of pcs
4202WV-2*3P	Wafer	板壳 Base PIN针 Copper Needle W/100 66 UL 94V-0 (White) Brass tin Plating	1000pcs/栋



P.C.B. LAYOUT

Dimensional Information:

Poles	Part NO.		Dimensions mm	
			A	B
2	A4202-WV02X1	5569-2X1A	--	5.40
4	A4202-WV02X2	5569-2X2A	4.20	9.65
6	A4202-WV02X3	5569-2X3A	8.40	13.85
8	A4202-WV02X4	5569-2X4A	12.60	18.05
10	A4202-WV02X5	5569-2X5A	16.80	22.25
12	A4202-WV02X6	5569-2X6A	21.00	26.45
14	A4202-WV02X7	5569-2X7A	25.20	30.65
16	A4202-WV02X8	5569-2X8A	29.40	34.85
18	A4202-WV02X9	5569-2X9A	33.60	39.05
20	A4202-WV2X10	5569-2X10A	37.80	43.25
22	A4202-WV2X11	5569-2X11A	42.00	47.45
24	A4202-WV2X12	5569-2X12A	46.20	51.65

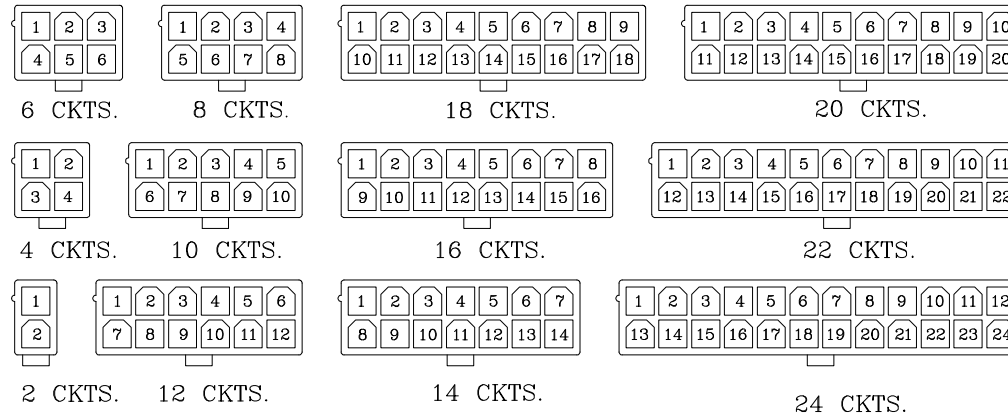

CIRCUIT SIZE LAYOUT

规格 Specifications

- ◆1、极数 Poles: 1X2P/1X6P to 2X1P/2X12P
- ◆2、额定电流 Current rating: 5.0A AC, DC
- ◆3、额定电压 Voltage rating: 250V AC, DC
- ◆4、温度范围 Temperature range: -25°C to +85°C
- ◆5、接触电阻 Contact resistance: ≤15mΩ
- ◆6、绝缘电阻 Insulation resistance: ≥1000mΩ
- ◆7、耐电压 Withstand voltage: 1500V AC/minute
- ◆8、适用线规 Applicable wire: AWG #18 to #22
- ◆9、适用基板厚度 (Applicable PC board thickness):

1.6mm to 2.0mm

未注公差				HWT 广州市恒炜电子有限公司 GuangZhou HengWei Electronic Co., Ltd					
>0-3	>3-18	>18-50	>50-120	单位	比例	Design Units	SIZE	页码	
±0.12	±0.15	±0.3	±0.5	MM Only	—	METRIC	A4		
制作	审核	批准		材料	图号			Part No	
姚灿瑜	陈小波	王日和		见图解	品名	4.2 (4202) WV-2*3P			