
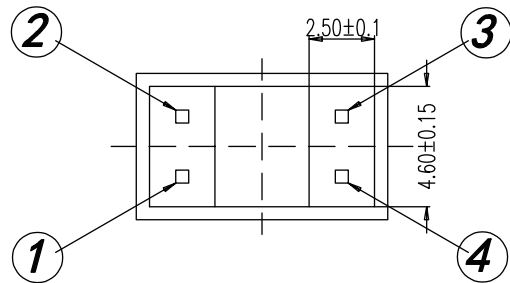
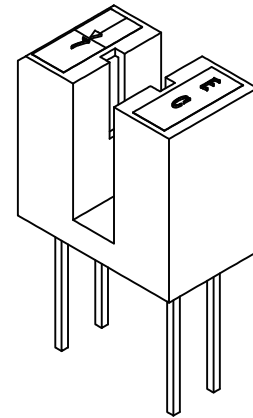


- ① Anode
- ② Cathode
- ③ Collector
- ④ Emitter

Features

- Fast response time
- Cut-off visible wavelength $\lambda_p=940\text{nm}$
- High sensitivity
- Pb free
- This product itself will remain within RoHS compliant version

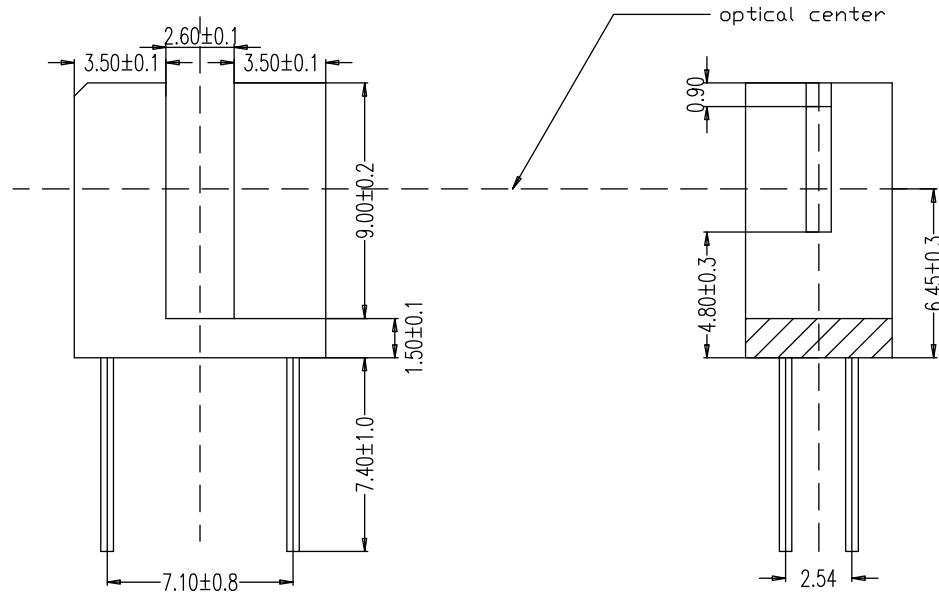

| | | | | | | | | | | | |
|-------------|---------------------|------------|-------------------|------------|---------------|-------------------|-------------------|---------|-------------------|---|--|
| 制图 DRAWN | 变更内容 DESCRIPTION | 日期 DATE | GENERAL TOLERANCE | | 制图 Mapping | 郑 弋 2024.03.11 | 料号 PART NO. | ITR8105 | 版本 REV. | A | |
| | | | X.±0.25 | X.*±2° | | | 品名 TITLE | | 页次 SHEET | | |
| | | | .X±0.20 | .X*±1° | | | 客户料号 CUTM. NO. | | | | |
| | | | .XX±0.15 | .XX*±0.5° | | | 核准 Approved | | 杨 斌 2024.03.11 | | |
| | | | .XXX±0.10 | .XXX*±0.5° | | | 单位 Units | | MM | | |

HWT 广州市恒炜电子有限公司
GuangZhou HengWei Electronic Co., Ltd